

STORAGE TENT S75-ALU 10M



Clear-span width

1000 cm

side height

440 cm

ridge height

574 cm

Roof pitch

15°

Bay distance

250 cm

Gable uprights

2 gable uprights (per end)

Longest component

526 cm

Minimum tent length

750 cm

Maximum tent length

No limit

Main profile

170 x 88 x 3mm

Eave / corner connection

Internal eave insert

Door sizes (PVC door panels)

Side wall 220 cm / 450 cm x 390 cm

Gable end 450 cm x 430 cm

Max. allowed wind speed to DIN

62 mph windloading

0.5 kN/m²

Snow load

0.25 kN/m²

Cover

RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2



Special design

Sliding doors, rolling doors or service entrances

Trapezoidal metal sheets

Snow load 0.25 kN/m²:

Movable system on rollers

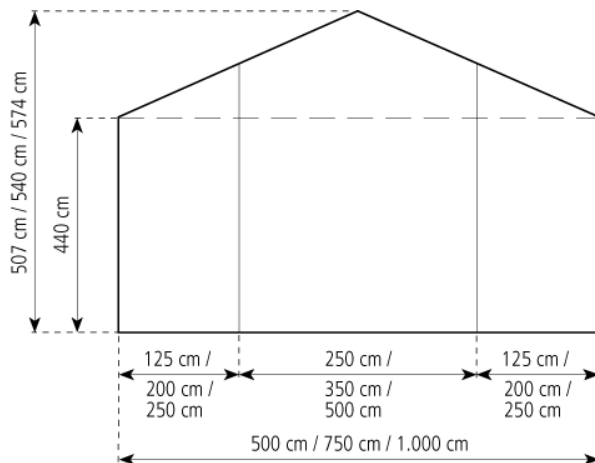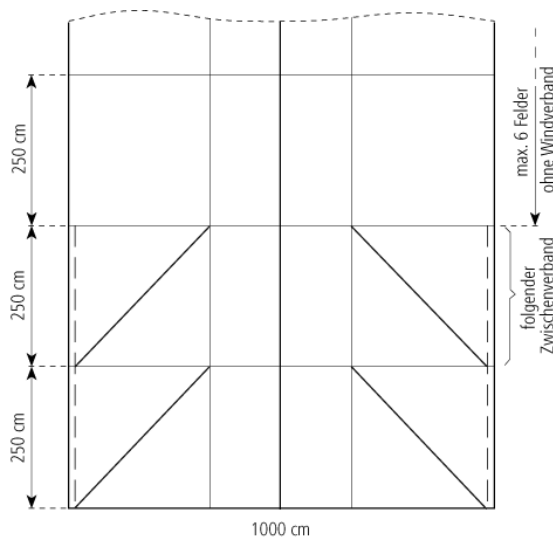

21.08.2008, www.r-zs.de/en/106

RÖDER Zelt- und Veranstaltungsservice GmbH
 63654 Büdingen Fon: +49 06049 700-0
 Verkauf: Am Lautenstein Fax: +49 06049 700-339
 Vermietung: An den Ellern Fon: +49 06049 700-309
 HRB 3261, Friedberg UST.-IdNr.: DE 112607812

Geschäftsführer:
 Rüdiger Blasius
 Jens Brüggemann
 St.-Nr.: 20 242 70249

Bank:
 WGZ Bank eG
 KBC Bank DTLD AG
 Fortis Bank
 Duns-Nr.: 32-239-9494

IBAN BLZ Konto
 DE73 400 600 00 0000 772 633
 DE86 500 203 00 0000 295 086
 DE15 370 106 00 1102 421 161
 info@r-zs.com

SWIFT/BIC
 GENO DE MS
 BANV DE HB 500
 GEBADE 33
 www.r-zs.com