

BIG TENT 30M



Clear-span width

3000 cm

side height

300 cm

ridge height

787 cm

Roof pitch

18°

Bay distance

500 cm

Gable uprights

5 gable uprights (per end)

Longest component

1070 cm

Minimum tent length

2000 cm

Maximum tent length

No limit

Main profile

250 x 120 x 5/4mm

Eave / corner connection

Clevic-plate connection with ridge strut

Max. allowed wind speed to DIN

62 mph windloading

0.5 kN/m²

Extension / lean-to options

Extension (max. span 500 cm, located anywhere, both sides, any length)

½ dodecagonal at gable end

Flooring options

Woodenfloor with timber and steel

sub-construction

Aluminium cassettefloor with plywood or full



aluminiumboards

Cover

RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2

Special design

Portal beams can be used in place of cross struts

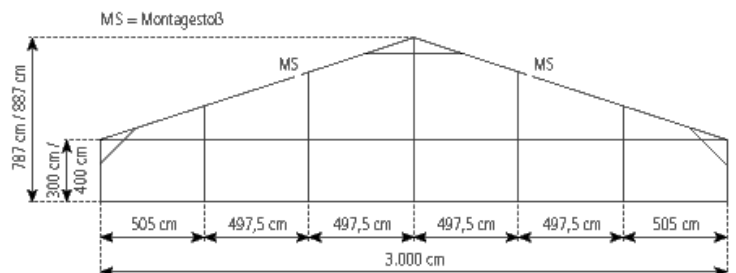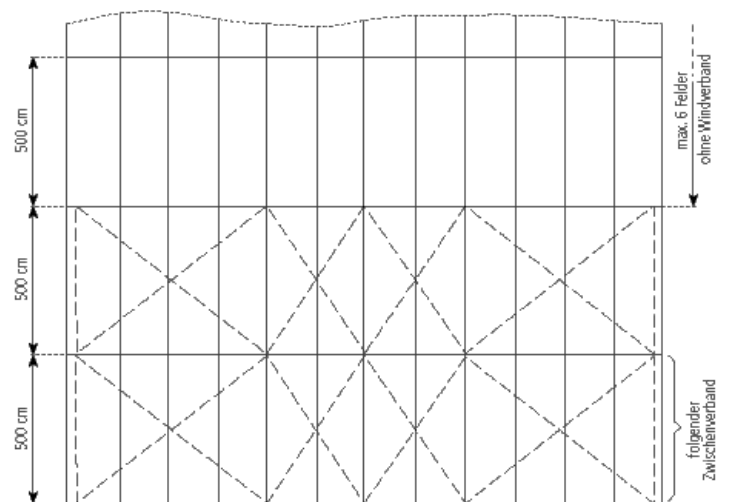

13.10.2008, www.r-zs.de/en/72

RÖDER Zelt- und Veranstaltungsservice GmbH
63654 Büdingen Fon: +49 06049 700-0
Verkauf: Am Lautenstein Fax: +49 06049 700-339
Vermietung: An den Ellern Fon: +49 06049 700-309
HRB 3261, Friedberg UST.-IdNr.: DE 112607812

Geschäftsführer:
Rüdiger Blasius
Jens Brüggemann
St.-Nr.: 20 242 70249

Bank:
WGZ Bank eG
KBC Bank DTLD AG
Fortis Bank
Duns-Nr.: 32-239-9494

IBAN BLZ Konto
DE73 400 600 00 0000 772 633
DE86 500 203 00 0000 295 086
DE15 370 106 00 1102 421 161
info@r-zs.com

SWIFT/BIC
GENO DE MS
BANV DE HB 500
GEBADE 33
www.r-zs.com