

PARTY TENT HOLIDAY 6.04M



Clear-span width

604 cm

side height

230 cm

ridge height

328 cm

Roof pitch

18°

Bay distance

300/500 cm

Gable uprights

1 gable upright (per end)

Longest component

375/549 cm

Minimum tent length

300/500 cm

Maximum tent length

No limit

Main profile

110 x 68 x 3mm

Eave / corner connection

Internal eave insert

Max. allowed wind speed to DIN

50 mph windloading

0.3 kN/m²

Extension / lean-to options

Extension (max. span 300 cm located anywhere, both sides, any length),

½ hexagonal at gable end

Flooring options

Woodenfloor with timber or steel

sub-construction

Aluminium cassettefloor with plywood or full

aluminiumboards

Compactfloor

Cover

RÖDER No. 1: PVC-coated polyester textile,




flame retardant to DIN 4102 B1, M2

Special design

Portal beams can be used in place of cross struts

By using woodenfloor with steel sub-construction and weights anchoring can be omitted

By using compactfloor anchoring can be omitted

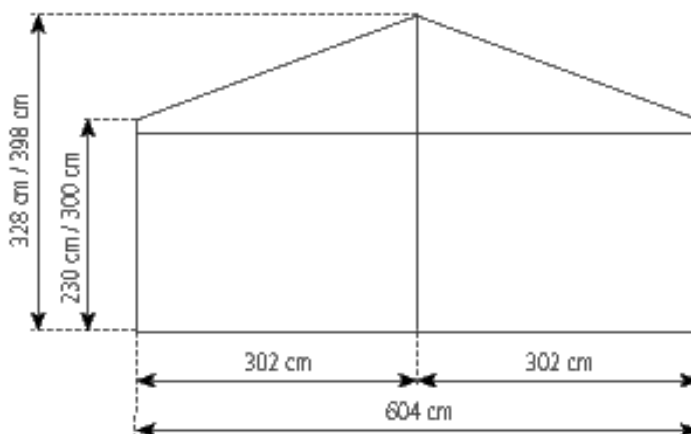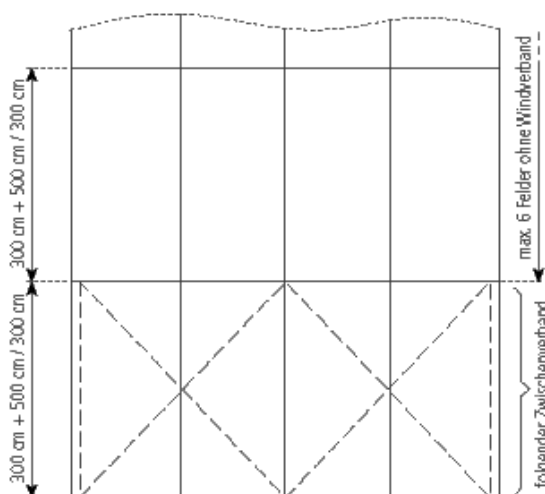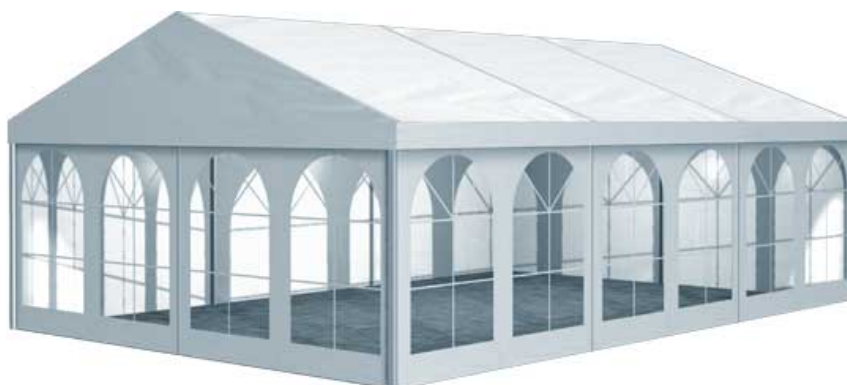

05.09.2008, www.r-zs.de/en/34

RÖDER Zelt- und Veranstaltungsservice GmbH
 63654 Büdingen Fon: +49 06049 700-0
 Verkauf: Am Lautenstein Fax: +49 06049 700-339
 Vermietung: An den Ellern Fon: +49 06049 700-309
 HRB 3261, Friedberg UST.-IdNr.: DE 112607812

Geschäftsführer:
 Rüdiger Blasius
 Jens Brüggemann
 St.-Nr.: 20 242 70249

Bank:
 WGZ Bank eG
 KBC Bank DTLD AG
 Fortis Bank
 Duns-Nr.: 32-239-9494

IBAN BLZ Konto
 DE73 400 600 00 0000 772 633
 DE86 500 203 00 0000 295 086
 DE15 370 106 00 1102 421 161
 info@r-zs.com

SWIFT/BIC
 GENO DE MS
 BANV DE HB 500
 GEBADE 33
 www.r-zs.com