

# BIG TENT 20M

**Clear-span width**

2000 cm

**side height**

300 cm

**ridge height**

625 cm

**Roof pitch**

18°

**Bay distance**

500 cm

**Gable uprights**

3 gable uprights (per end)

**Longest component**

1070 cm

**Minimum tent length**

2000 cm

**Maximum tent length**

No limit

**Main profile**

220 x 100 x 3mm

**Eave / corner connection**

Slide connection with ridge strut

**Max. allowed wind speed to DIN**

62 mph windloading

0.5 kN/m<sup>2</sup>

**Extension / lean-to options**

Extension (max. span 400 cm, located anywhere, both sides, any length)

½ octagonal at gable end

**Flooring options**

Woodenfloor with timber or steel

sub-construction

Aluminium cassetefloor with plywood or full

aluminiumboards



Compactfloor

**Cover**

RÖDER No. 1: PVC-coated polyester textile, flame retardant to DIN 4102 B1, M2

**Special design**

Spars with site joints permit the construction of a 15 m tent with the same frame components  
By using compactfloor anchoring can be omitted  
Portal beams can be used in place of cross struts

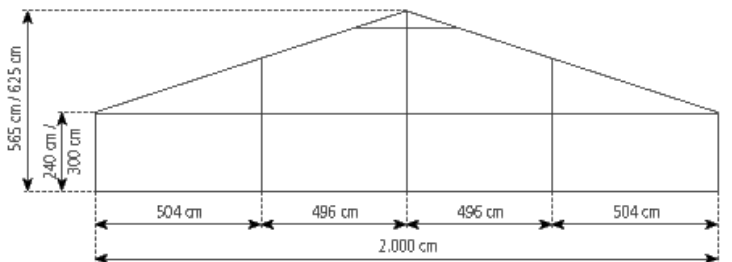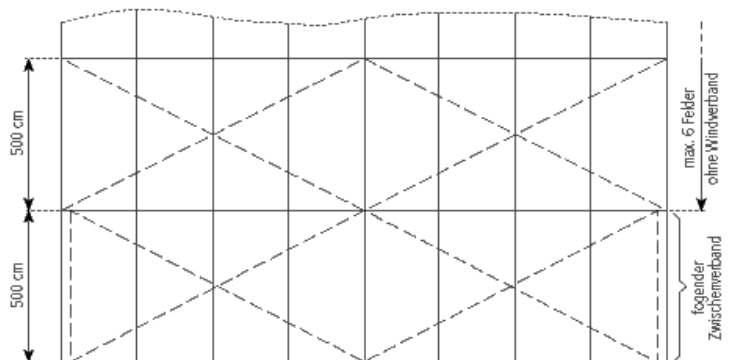

06.09.2008, [www.r-zs.de/en/63](http://www.r-zs.de/en/63)

RÖDER Zelt- und Veranstaltungsservice GmbH  
63654 Büdingen Fon: +49 06049 700-0  
Verkauf: Am Lautenstein Fax: +49 06049 700-339  
Vermietung: An den Ellern Fon: +49 06049 700-309  
HRB 3261, Friedberg UST.-IdNr.: DE 112607812

Geschäftsführer:  
Rüdiger Blasius  
Jens Brüggemann  
St.-Nr.: 20 242 70249

Bank:  
WGZ Bank eG  
KBC Bank DTLD AG  
Fortis Bank  
Duns-Nr.: 32-239-9494

IBAN BLZ Konto  
DE73 400 600 00 0000 772 633  
DE86 500 203 00 0000 295 086  
DE15 370 106 00 1102 421 161  
info@r-zs.com

SWIFT/BIC  
GENO DE MS  
BANV DE HB 500  
GEBADE 33  
www.r-zs.com